

TRACKRR LITE

Simple, Reliable Fleet Location Tracking

Saegic

A Clarience Technologies Company



PRODUCT OVERVIEW

The TrackRR Lite is a cost-effective asset tracking solution designed for fleets that need reliable location visibility without complexity. Ideal for containers, dry vans, dollies, chassis, and off-highway equipment, this compact tracker delivers essential location-only data in a simple, durable package.

SUITABLE FOR ASSETS REQUIRING LOW-FREQUENCY LOCATION UPDATES SUCH AS, BUT NOT LIMITED TO:

- Domestic Shipping Containers
- Storage Containers
- Dolly Trailers
- Storage/Shipping Pods
- Chassis
- Dry Vans
- Box Trucks
- For applications of interest but not listed, please contact our sales team

Can be used as a primary or secondary (stealth) asset tracker.

FEATURES:

- **No Wiring Required:** Mounts in minutes with VHB tape or screws.
- **Long-Life Battery:** Up to 8 years of dependable operation.
- **Flexible Reporting:** Configurable intervals (1 to 4 pings per day) to match fleet needs.
- **Rugged Design:** IP67/IP69K housing built for harsh environments.


See More. Decide Faster.

From trailer utilization to cargo status, Fus1on provides real-time operational insight to help you optimize performance, improve asset usage, and stay in control. Accessible from any device, it keeps critical information within reach when decisions matter most.

fus1on™



TECHNICAL SPECIFICATIONS

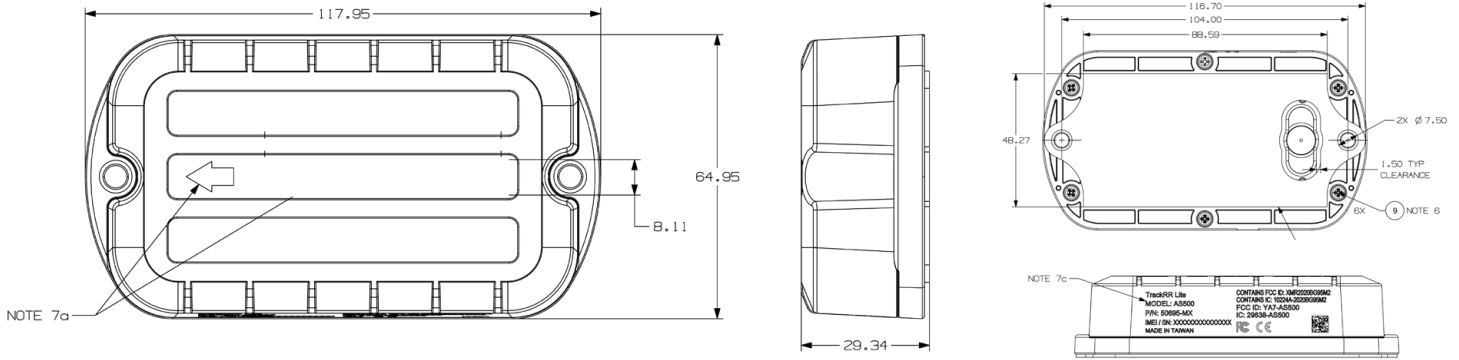

OPERATION MODES

Standard Mode	1 report per day is default. Customizable up to 4 reports per day.
---------------	--

CONNECTIVITY

Cellular	LTE CAT-M cellular connectivity. Coverage in North America, (US, Canada, Mexico)
----------	--

GPS	Engine:	GPS & GLONASS
	Fix Time:	30s average
	Location Accuracy:	2.5m (CEP 50%)
	Antenna:	Internal

CERTIFICATIONS

Standards	FCC, IC, PTCRB, CE, RoHS
Carrier	AT&T, Verizon

DATA SECURITY

Data Security	Secure MQTT Communication SSL Data Encryption
---------------	--

ENVIRONMENTAL

Operating Temp	-40C to +60C Humidity, Vibration/Shock, Salt Fog, Solar Radiation, Low Pressure, IP67, IP69K
----------------	---

ELECTRICAL

Operating Voltage	4.5V
Battery Life*	1 report/day = 7.5 years 2 reports/day = 5.0 years 3 reports/day = 3.5 years 4 reports/day = 3.0 years

Mounting Methods	VHB tape Screws (metal or wood surfaces) VHB tape + screws
------------------	--

**Based on average GPS Fix time under ideal conditions.*

Saegic saegic.com 1.877.537.3820

1501-SG-TrackRR-Lite-SS-TT-09092026

Copyright ©2026 Saegic is a Clariance Technologies Company. All rights reserved. No part of this publication may be reproduced by any means without written permission from Saegic. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

